

Workshop on Reducing Internet Latency

goals for taxonomy session

- survey sources of latency
- categorise solutions
 - quantify benefits
 - consider deployment aspects
 - short-term & long-term applicability
- common reference framework for discussions
- schedule
 - [10-15] Joe Touch, ISI Factors underlying the problem space
 - [10-15] **Bob Briscoe**, BT Solution space – systems focus
 - [10-15] Lucien Avramov, Cisco Solution space – intra-box focus
 - [10-15] open to contributions from the floor
 - [50-30] discussion



REDUCING INTERNET TRANSPORT LATENCY

survey of latency reducing techniques and their merits *a work in progress*

Bob Briscoe, Anna Brunstrom, Gorry
Fairhurst, Stein Gjessing, David Hayes,
Andreas Petlund, David Ros, Ing-Jyh
Tsang

goal for this talk

- industry roadmap of techniques
- gain vs pain
 - latency reduction against deployability
- “A Survey of Latency Reducing Techniques and their Merits”
 - ~190 references
 - a work in progress
 - available soon via <http://riteproject.eu/publications/>
- evolved from BT roadmap work, but repurposed
 - a company tries to prioritise the quick wins
 - an industry also needs to identify hard problems being avoided

latency-reducing techniques

organised by sources of delay

3.1 Structural delays

- 3.1.1 Server placement
- 3.1.2 Sub-optimal route latency
- 3.1.3 Name resolution
- 3.1.4 Content placement

3.2 Interaction between endpoints

- 3.2.1 Protocol Initialisation
- 3.2.2 Secure session initialisation
- 3.2.3 Packet loss recovery delays:

3.3 Reducing delays along transmission paths

- 3.3.1 Propagation delay
- 3.3.2 Switching/routing delay
- 3.3.3 Queueing delay
- 3.3.4 Error correction delays

3.4 Reducing delays related to link capacities

- 3.4.1 Insufficient capacity
- 3.4.2 Redundant information
- 3.4.3 Under-utilised capacity
- 3.4.4 Collateral damage
- 3.4.4 Medium acquisition delays

3.5 Intra-end-host delays

- 3.5.1 Transport Protocol Stack buffering
- 3.5.2 Operating system delay

latency-reducing techniques

organised by sources of delay

3.1 Structural delays

- 3.1.1 Server placement
- 3.1.2 Sub-optimal route latency
- 3.1.3 Name resolution
 - 3.1.3.1 DNS cache placement
 - 3.1.3.2 DNS cache pre-fetching
- 3.1.4 Content placement
 - 3.1.4.1 Proxies and caches
 - 3.1.4.2 Prediction and latency hiding

3.2 Interaction between endpoints

- 3.2.1 Protocol Initialisation
 - 3.2.1.1 TCP fast open
 - 3.2.1.2 Pipelining
- 3.2.2 Secure session initialisation
 - 3.2.2.1 Transport layer security negotiation
 - 3.2.2.2 Building encryption into TCP
 - 3.2.2.3 Bootstrapping security from the DNS
- 3.2.3 Packet loss recovery delays:
 - 3.2.3.1 Application tolerance to errors and order of delivery
 - 3.2.3.2 Reduce error detection time
 - 3.2.3.3 Add redundancy

3.3 Reducing delays along transmission paths

- 3.3.1 Propagation delay
 - 3.3.1.1 Straighter cable paths
 - 3.3.1.2 Higher signal velocity
 - 3.3.1.3 Combining higher signal velocity and straighter routes
- 3.3.2 Switching/routing delay
- 3.3.3 Queueing delay
 - 3.3.3.1 Flow and circuit provisioning
 - 3.3.3.2 Packet scheduling
 - 3.3.3.3 Traffic shaping and policing
 - 3.3.3.4 Small buffers
 - 3.3.3.5 Queue management
 - 3.3.3.6 Transport-based queue control
- 3.3.4 Error correction delays
 - 3.3.4.1 Improve channel quality
 - 3.3.4.2 Hop based error correction and packet ordering


3.4 Reducing delays related to link capacities

- 3.4.1 Insufficient capacity
- 3.4.2 Redundant information
- 3.4.3 Under-utilised capacity
 - 3.4.3.1 More aggressive congestion control
 - 3.4.3.2 Rapidly sensing available capacity
- 3.4.4 Collateral damage
- 3.4.4 Medium acquisition delays


3.5 Intra-end-host delays

- 3.5.1 Transport Protocol Stack buffering
- 3.5.2 Operating system delay

case (1a): small (20kB) flow over WAN

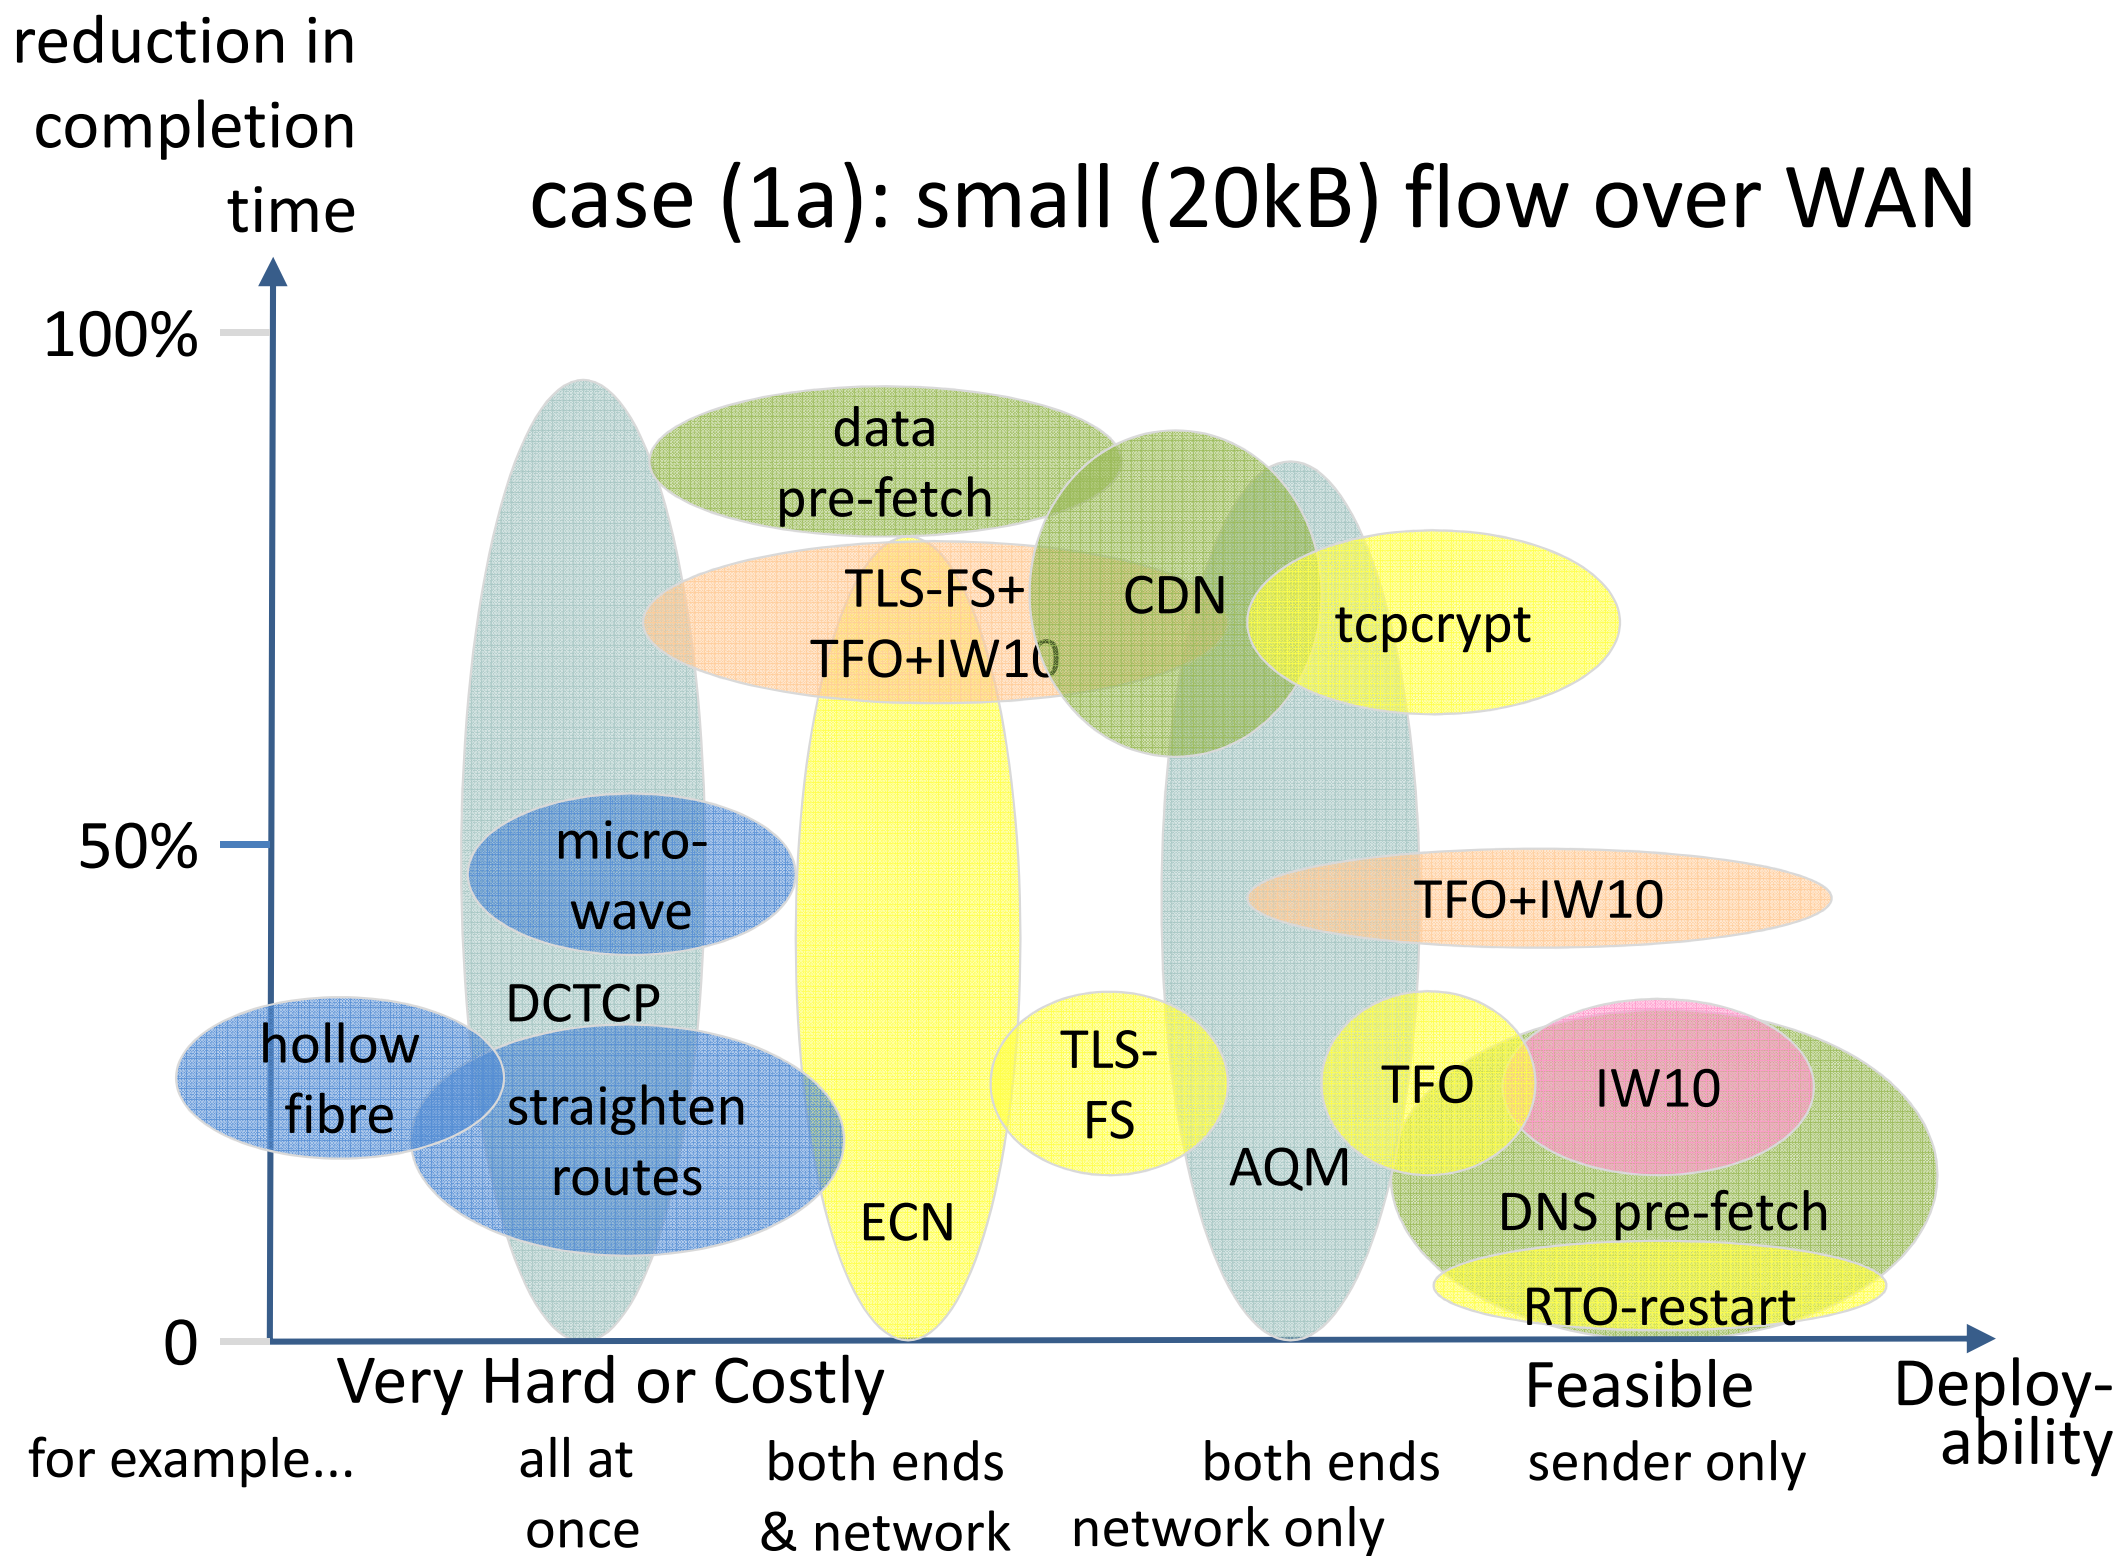

case (1b): small (20kB) flow over LAN

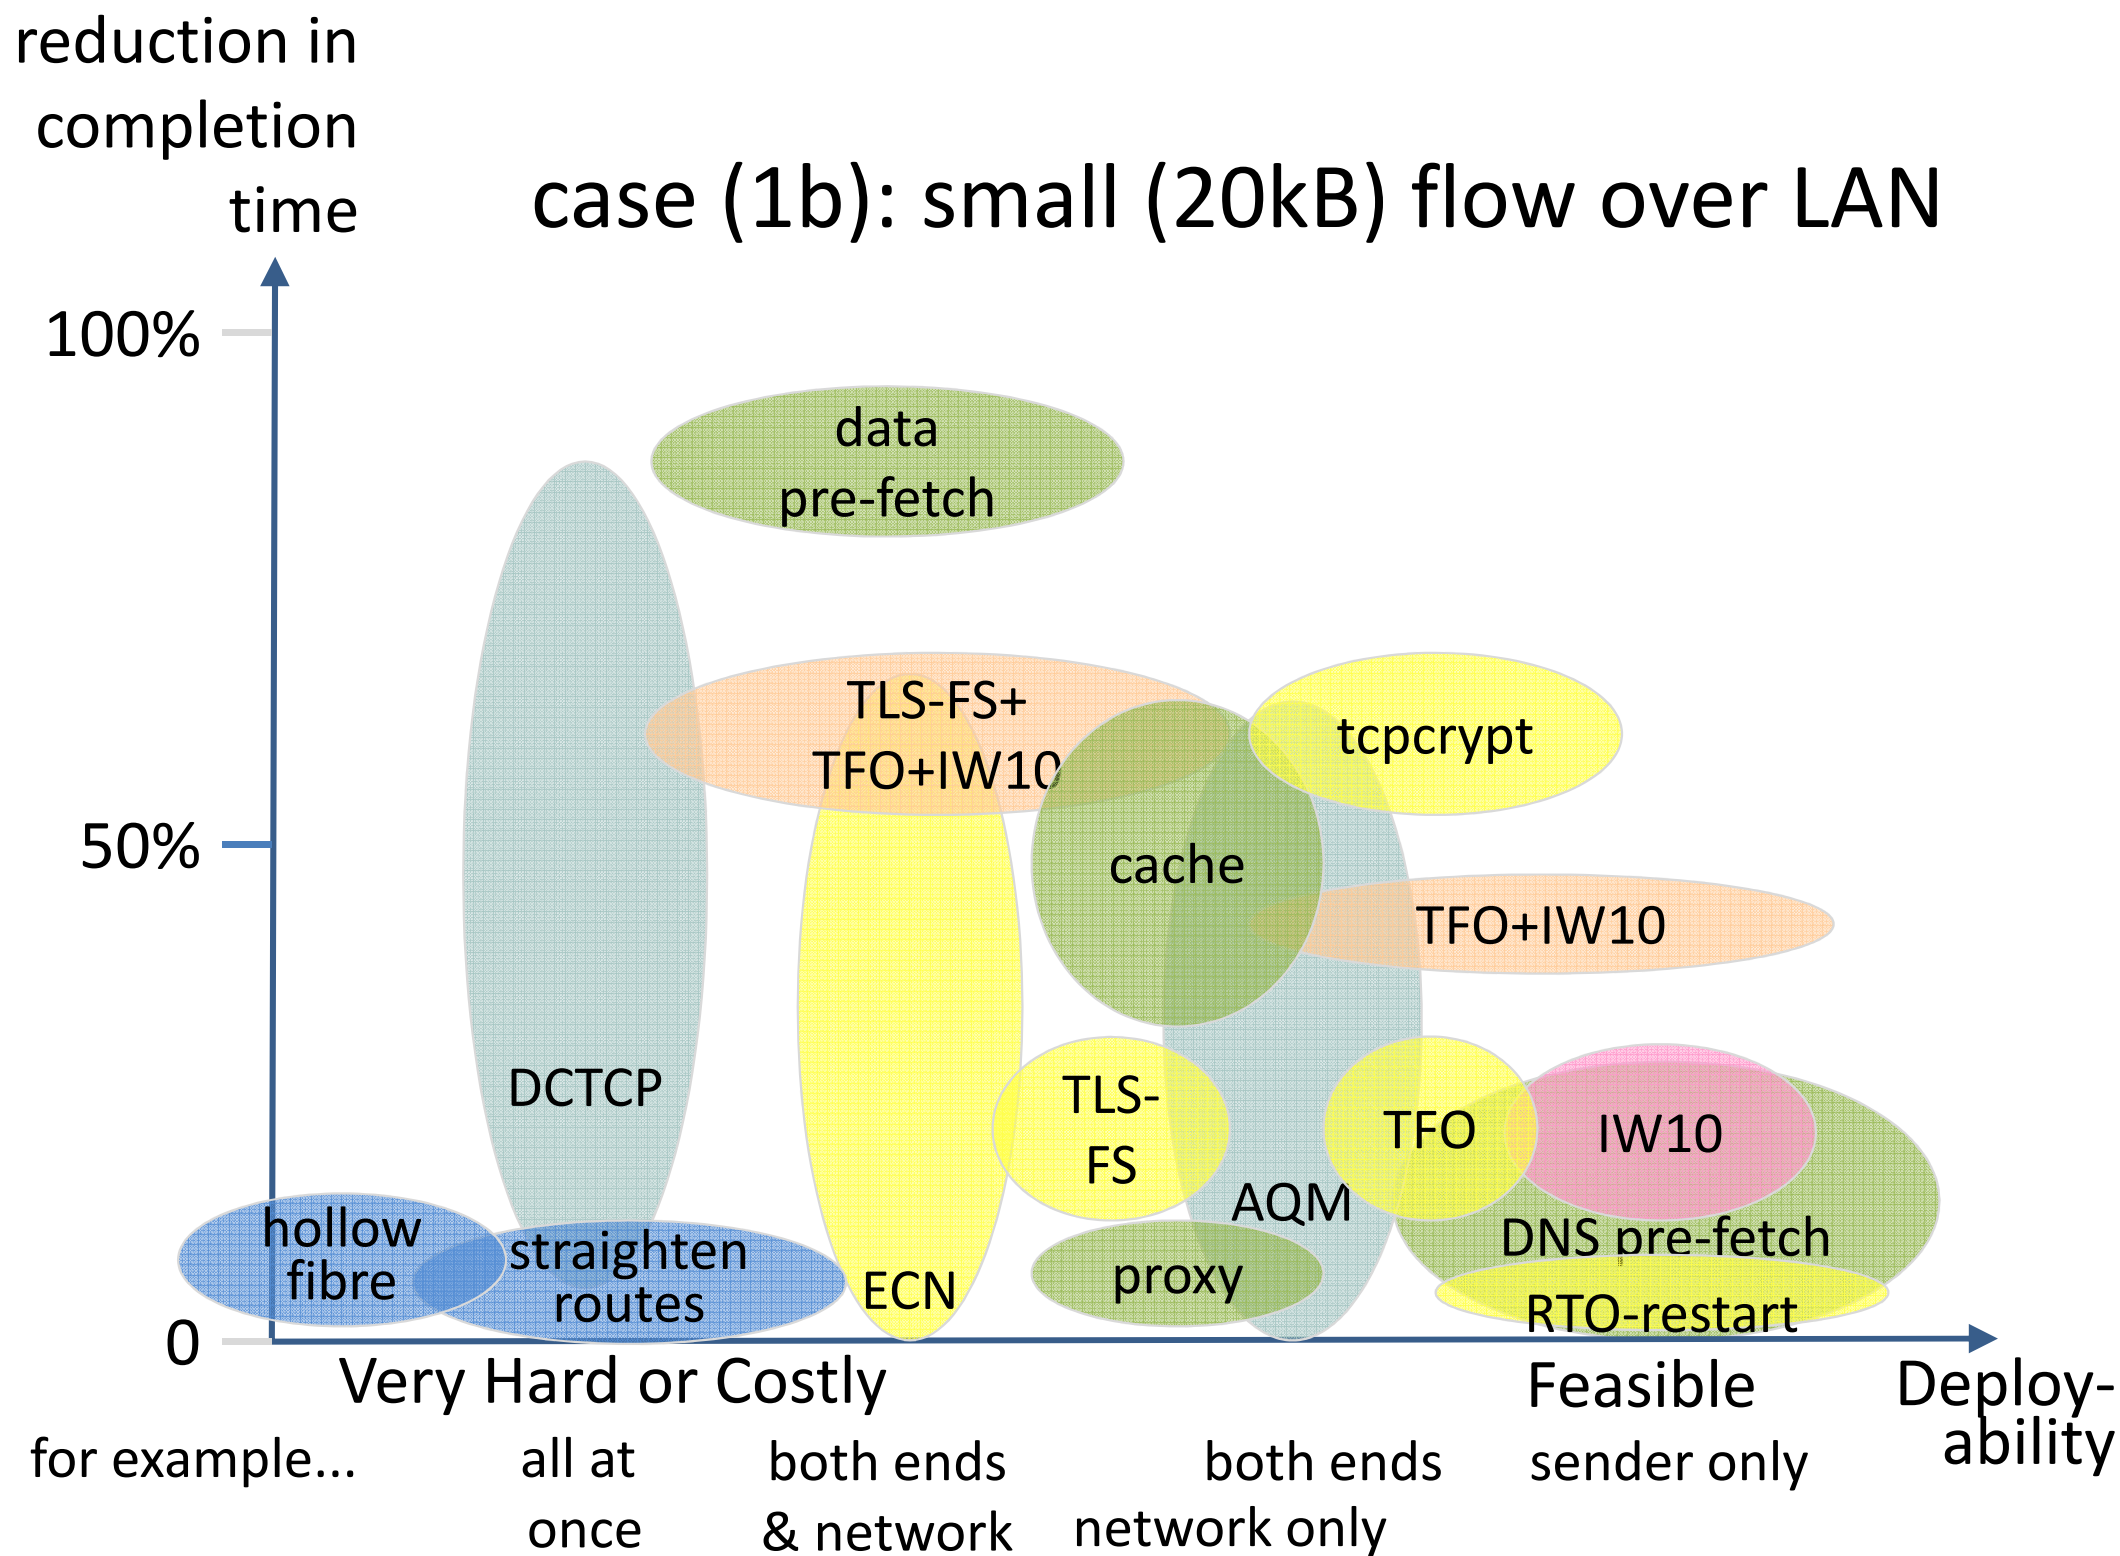

case (2a): large flow over WAN

reduction in
completion
time

100%

50%

data
pre-fetch

CDN

hollow fibre DCTCP microwave ECN TLS-FS AQM TFO+IW10 DNS pre-fetch

Very Hard or Costly

Feasible

Deploy-
ability

for example...

all at
once


both ends
& network

both ends
network only

sender only

Transaction Layer Security (TLS)

aka secure sockets layer (SSL) or https

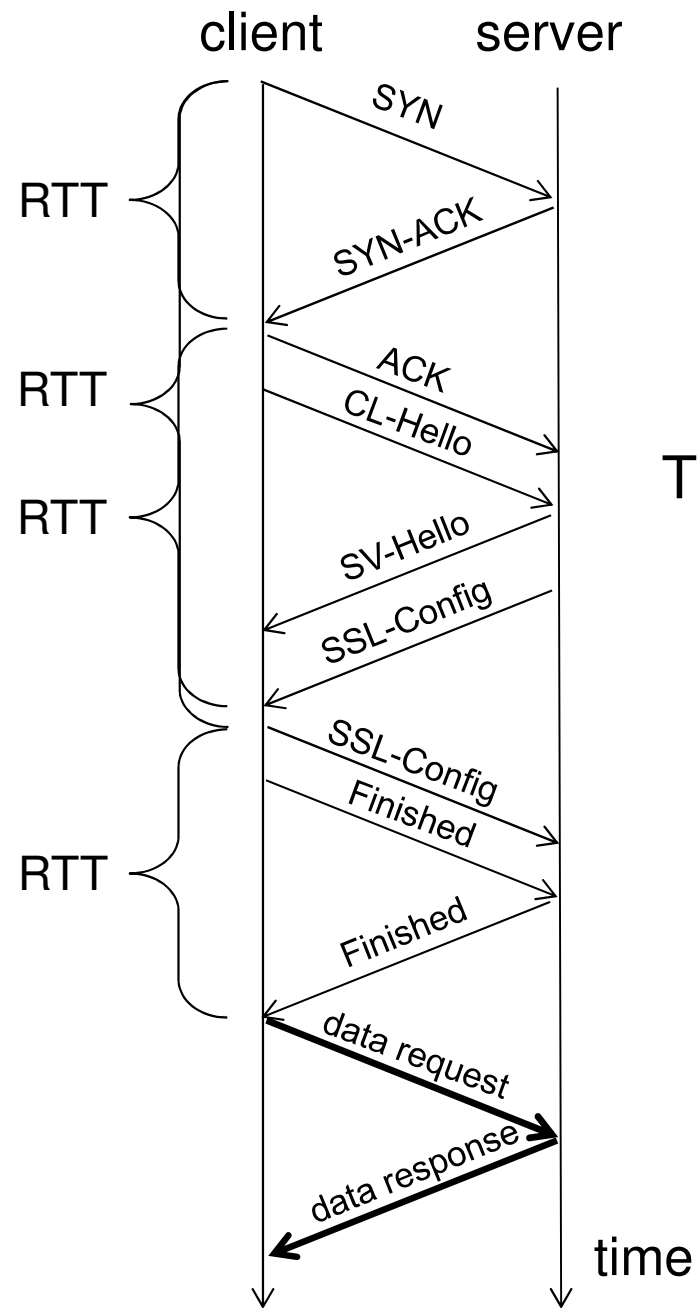

TLS adds: 2 RTTs

False Start cuts this to: 1 RTT

TLS with TCP handshake: 3 RTTs

TLS with TCP Fast Open: 1 RTT



REDUCING INTERNET TRANSPORT LATENCY

a figure of merit: average rate

Bob Briscoe, BT

Anna Brunstrom, Mohammad Raziullah,
Karlstad University

Olga Bondarenko, Simula Research Labs

inaccessible capacity in a dedicated access link

capacity
inaccessible to
a lone flow in a:



1Gb/s link

80Mb/s link

IW: initial window
(Google has just
increased from 3 to 10)

R: round trip time
(~20ms: intra-UK
~200ms inter-continent)

X: bottleneck capacity

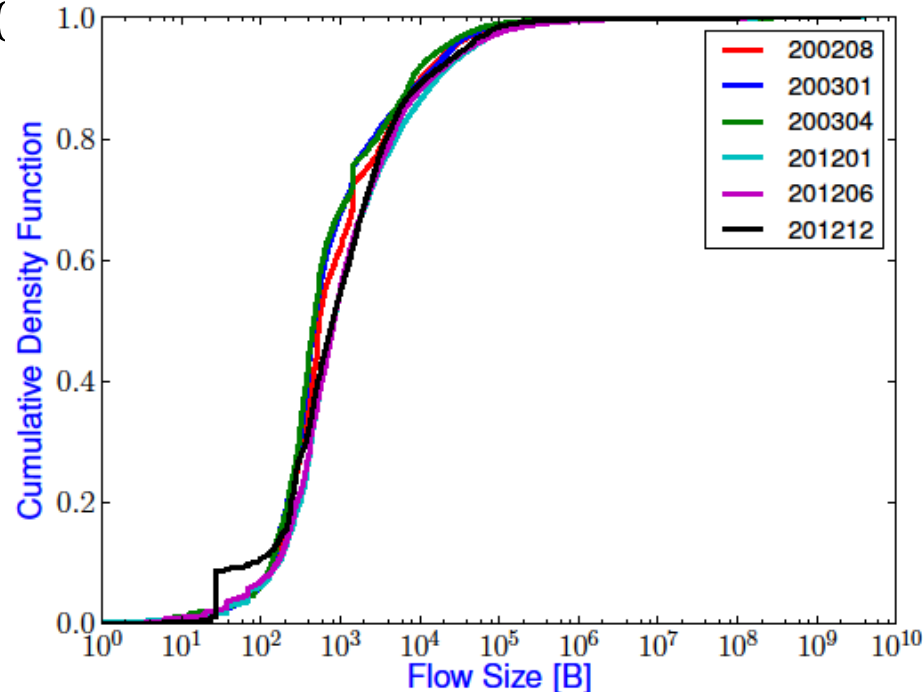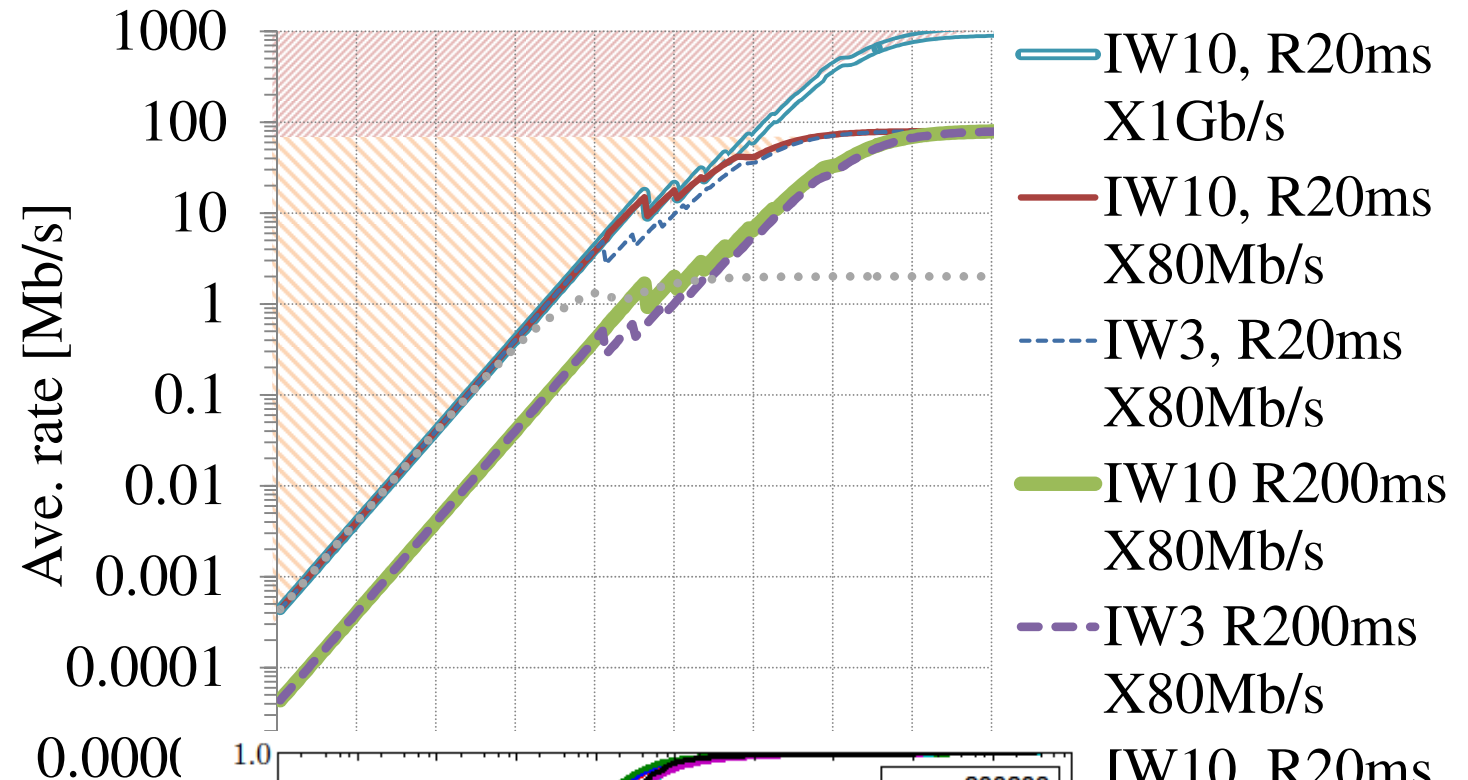

- below a certain size, a single transfer (of any number of flows) is limited by the slow-start rule, not capacity
- as capacity growth continues, more transfers are limited by the rule than by capacity

CDF w.r.t # of Flows

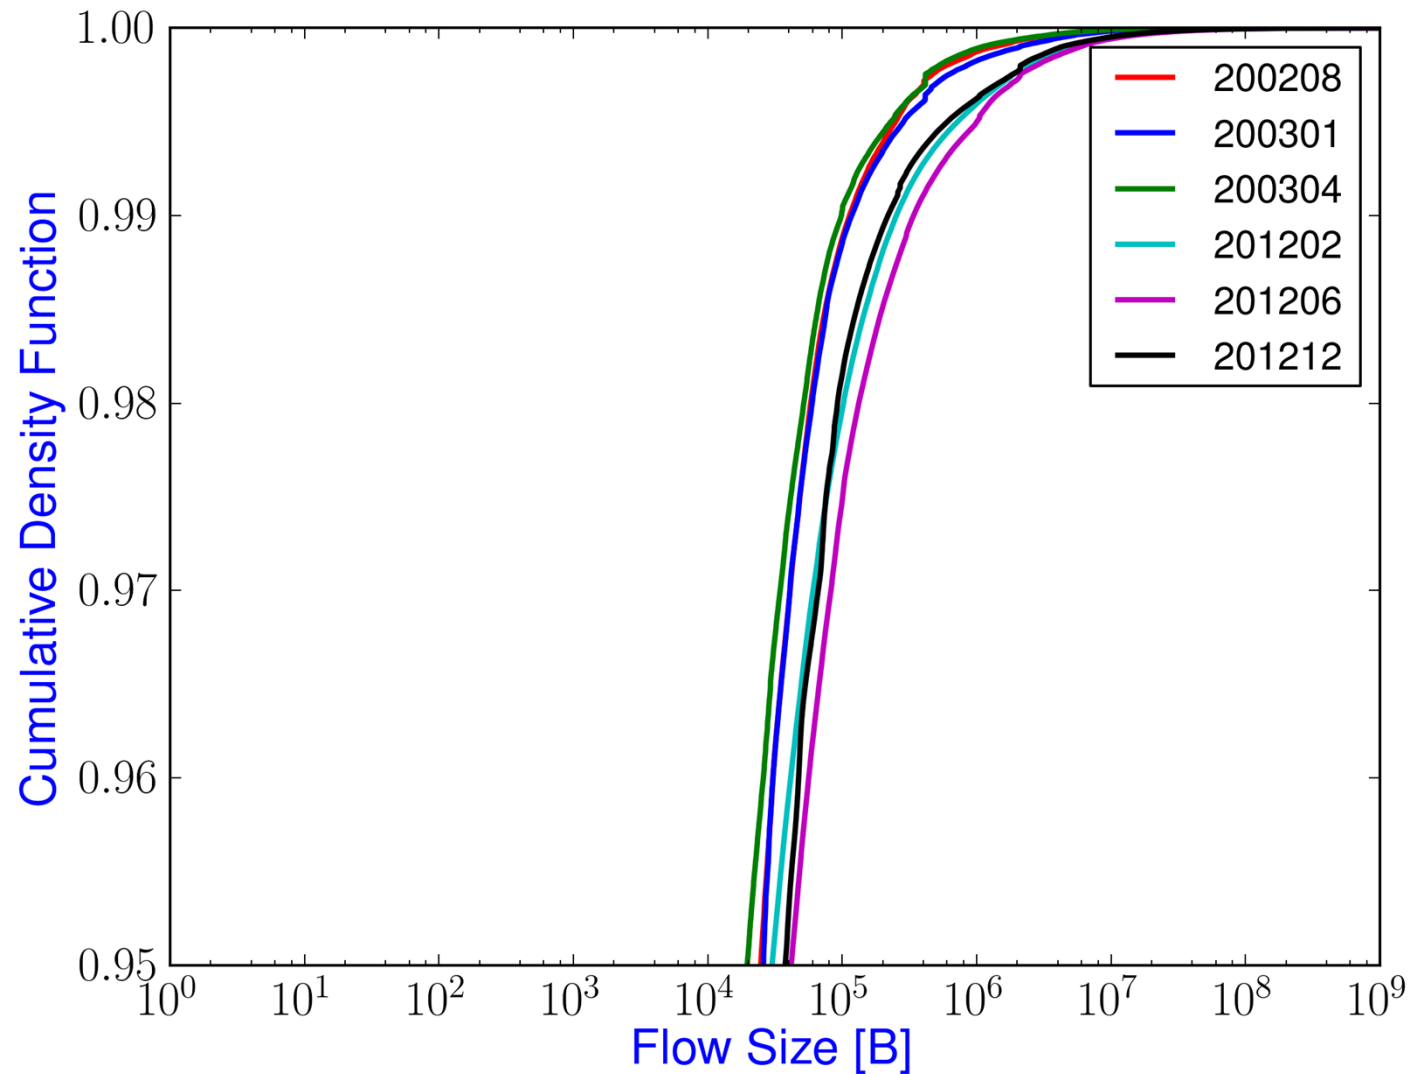


Fig. I: Prob. of number of flows seen for a given flow size

CDF w.r.t Fraction of Bytes

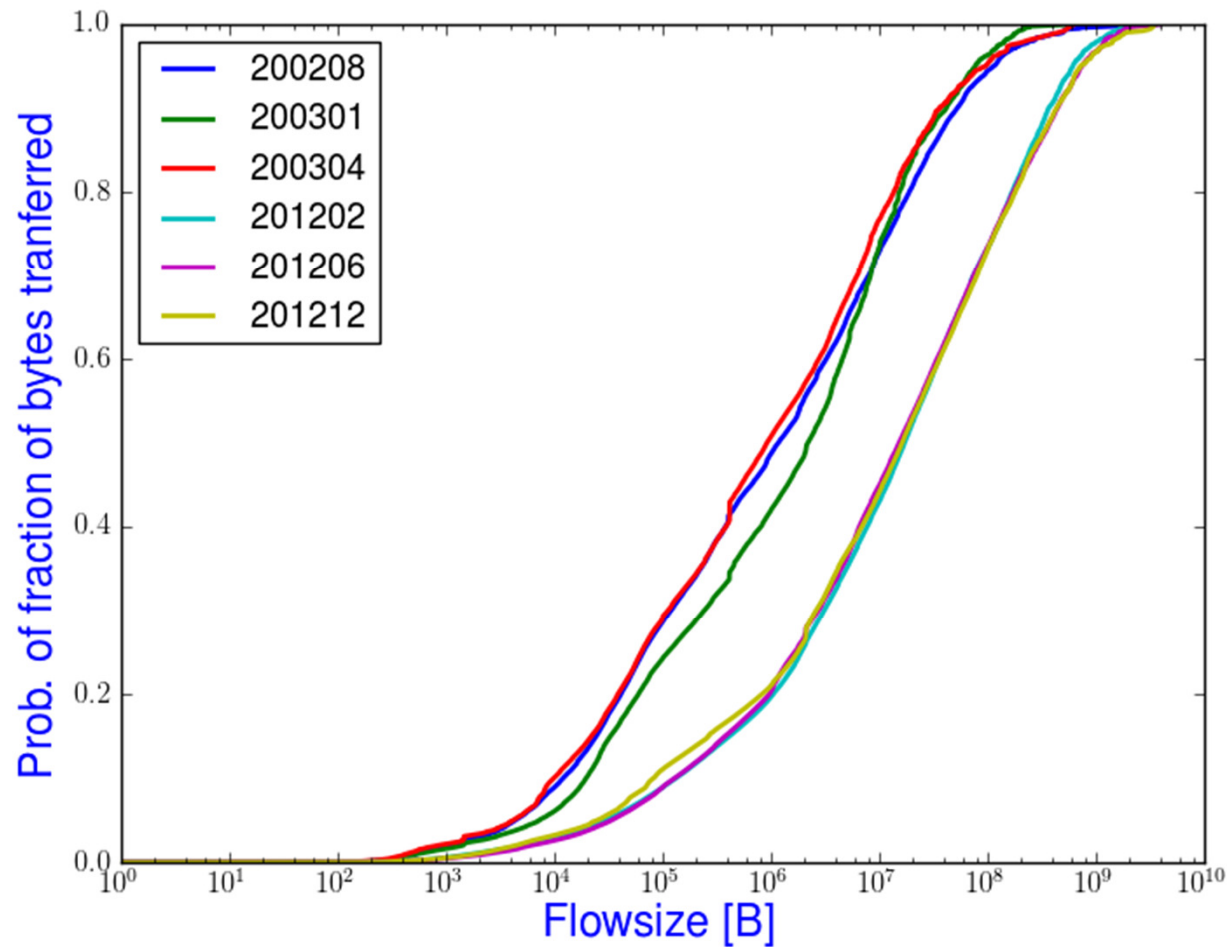


Fig. 2: Prob. of fraction of total bytes transferred for a given flow size